


# VersiTrim 300 EdgeBox RI



## Order Specification Form

ANSI/SPRI/FM4435/ES-1 TEST PRESSURES UP TO 911 PSF (VERTICAL) AND 526 PSF (HORIZONTAL)

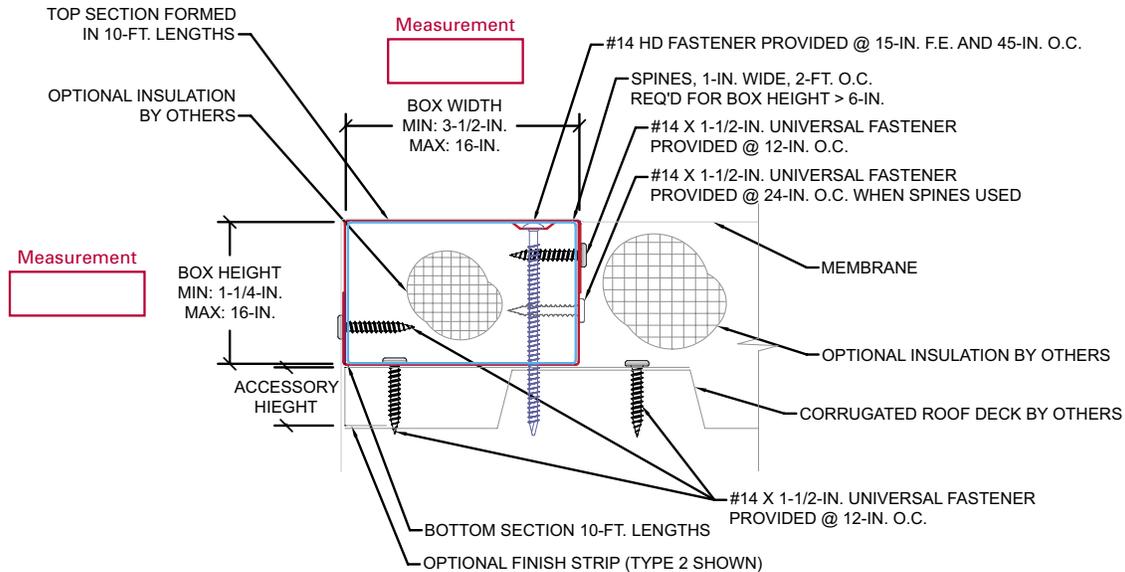

PRE-DRILL WITH 3/16-IN. DRILL BIT FOR MASONRY CONDITIONS.  
CONTACT US FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED  
ANSI/SPRI/FM4435/ES-1 DESIGN CRITERIA

QUANTITY		MATERIAL	ADDITIONAL ACCESSORIES	MATERIAL
___	Total LF	Mill Galvanized	___	Mill Galvanized
___	End Caps ( ___ Left, ___ Right)	_____	___	_____
<b>DIMENSIONS</b>		<b>THICKNESS</b>	___	<b>THICKNESS</b>
___	Box Width	20 Ga	___	20 GA
___	Box Height	_____	___	_____
			___	_____

<b>APPROVALS:</b> Contact manufacturer for verification of test report data on your project.		<b>CUSTOMER APPROVAL</b> Authorized Customer Signature	
 		Approved for Fabrication Approved with Changes Not Approved	
		_____ Title Date	
Job Name:	Job #:	By:	
Customer:	Project Location:	Date:	
Representative:	Architect:	Sheet	of

# VersiTrim 300 EdgeBox RI

