




# SECUREDGE 2000 HG FASCIA

FULLY ADHERED OR MECHANICALLY ATTACHED SINGLE-PLY VERSION

## NOTES

- Fascia cover provided with splice plates
- 10" cover not available in 24 ga. galv. steel or .040" aluminum
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 365 psf

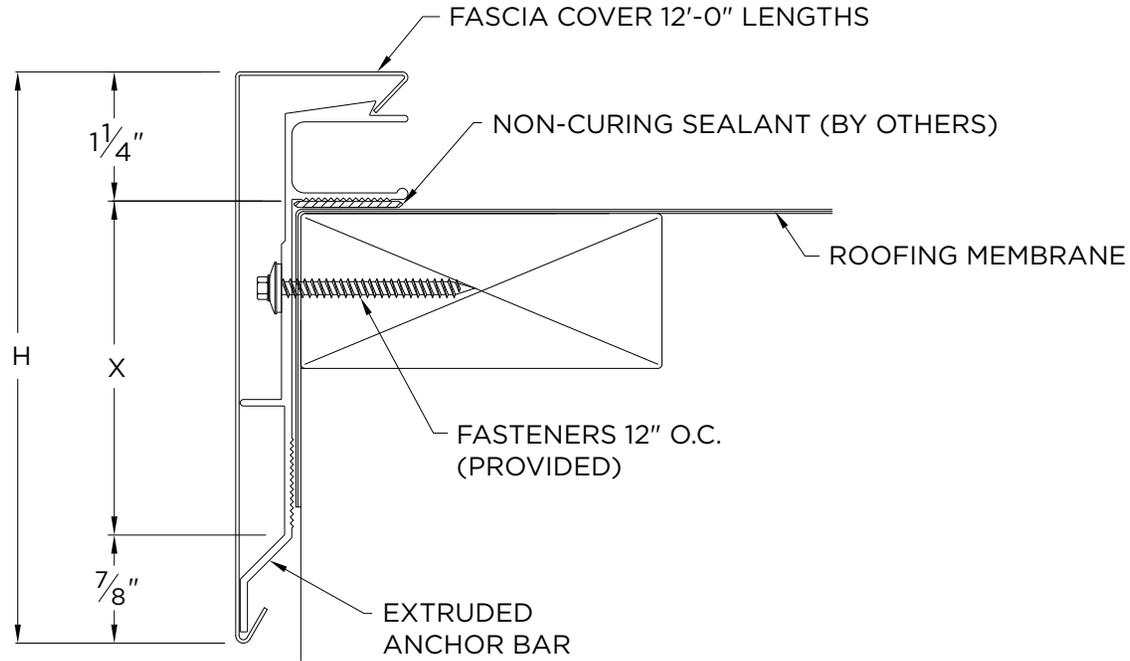

## APPROVALS



**ANSI/SPRI/FM 4435/ES-1**  
Test Pressures listed in notes

## PROJECT INFO

Project Name: \_\_\_\_\_

Architect: \_\_\_\_\_

Roofing Contractor: \_\_\_\_\_

### Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: \_\_\_\_\_

CKD BY: **MM**

DWG #: 15010-5558

REV: **I**

## DIMENSIONS

PRODUCT ID. NO.	H DIM	X DIM	NAILER COVERAGE
<input type="checkbox"/> HG-AF-40	4"	1 7/8"	1 NAILER
<input type="checkbox"/> HG-AF-55	5 1/2"	3 3/8"	2 NAILERS
<input type="checkbox"/> HG-AF-70	7"	4 7/8"	3 NAILERS
<input type="checkbox"/> HG-AF-85	8 1/2"	6 3/8"	4 NAILERS
<input type="checkbox"/> HG-AF-100	10"	7 7/8"	5 NAILERS

## MATERIAL

- 24 Ga. Galv. Steel
  - 22 Ga. Galv. Steel
  - .040" Aluminum
  - .050" Aluminum
  - .063" Aluminum
  - OTHER: \_\_\_\_\_
- Color: \_\_\_\_\_  
Finish: \_\_\_\_\_
- Substrate:**  Wood  
If substrate is not given, wood fasteners will be provided.  Masonry  
 Metal

## QUANTITIES

- \_\_\_\_\_ Lineal Feet (12'-0" Lengths)
  - \_\_\_\_\_ Outside Miter (90°)
  - \_\_\_\_\_ Inside Miter (90°)
  - \_\_\_\_\_ Right Endcaps
  - \_\_\_\_\_ Left Endcaps
  - \_\_\_\_\_ Right Endwall Flashing
  - \_\_\_\_\_ Left Endwall Flashing
  - \_\_\_\_\_ Overflow Scupper
    - Style A
    - Style B
  - \_\_\_\_\_ Spillout Scupper
    - Style A
    - Style B
  - \_\_\_\_\_ Downspout Scupper
    - Style A
    - Style B
- Size \_\_\_\_\_x\_\_\_\_\_
- Style A=Tapered 1.5" Drop | Style B=Flat