




SECUREDGE 2000 CANTED WD FASCIA

GALVANIZED WATERDAM VERSION

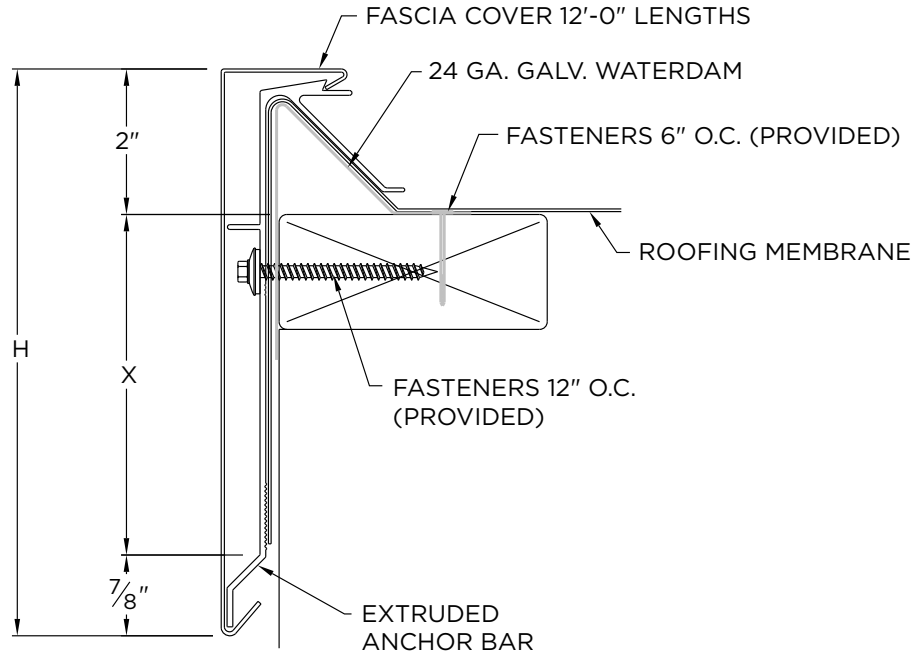

NOTES

- Fascia cover provided with splice plates
- 10" cover not available in 24 ga. galv. steel or .040" aluminum
- 5.5" extruded bar varies in design at lower kick
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 293 psf

APPROVALS



ANSI/SPRI/FM 4435/ES-1
Test Pressures listed in notes

PROJECT INFO

Project Name: _____

Architect: _____

Roofing Contractor: _____

Project Type: _____

☐ By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: _____

Carlisle SynTec Systems
Customer Service
866-458-3537
(Metal-Era)

SHT# 1 of 1

DATE: 11/29/21

DRN BY: JJC

CKD BY: MM

DWG #: 15010-1643

REV: M

DIMENSIONS

PRODUCT ID. NO.	H DIM	X DIM	NAILER COVERAGE
☐ AEFC-552	5 1/2"	2 5/8"	1 NAILER
☐ AEFC-752	7 1/2"	4 5/8"	2 NAILERS
☐ AEFC-852	8 1/2"	5 5/8"	3 NAILERS
☐ AEFC-1002	10"	7 1/8"	4 NAILERS

MATERIAL

- ☐ 24 Ga. Galv. Steel
☐ 22 Ga. Galv. Steel
☐ .040" Aluminum
☐ .050" Aluminum
☐ .063" Aluminum
☐ OTHER: _____

Color: _____

Finish: _____

Substrate: ☐ Wood
☐ Masonry
☐ Metal
If substrate is not given, wood fasteners will be provided.

QUANTITIES

_____ Lineal Feet (12'-0" Lengths)

_____ Outside Miter (90°)

_____ Inside Miter (90°)

_____ Right Endcaps

_____ Left Endcaps

_____ Right Endwall Flashing

_____ Left Endwall Flashing

_____ Overflow Scupper
☐ Style A
☐ Style B

_____ Spillout Scupper
☐ Style A
☐ Style B

_____ Downspout Scupper
☐ Style A ☐ Style B
Size _____x_____

Style A=Tapered 1.5" Drop | Style B=Flat