


# SecurEdge Extender-B


## Order Specification Form

ANSI/SPRI/FM4435/ES-1 TEST PRESSURES UP TO 107 PSF (HORIZONTAL)


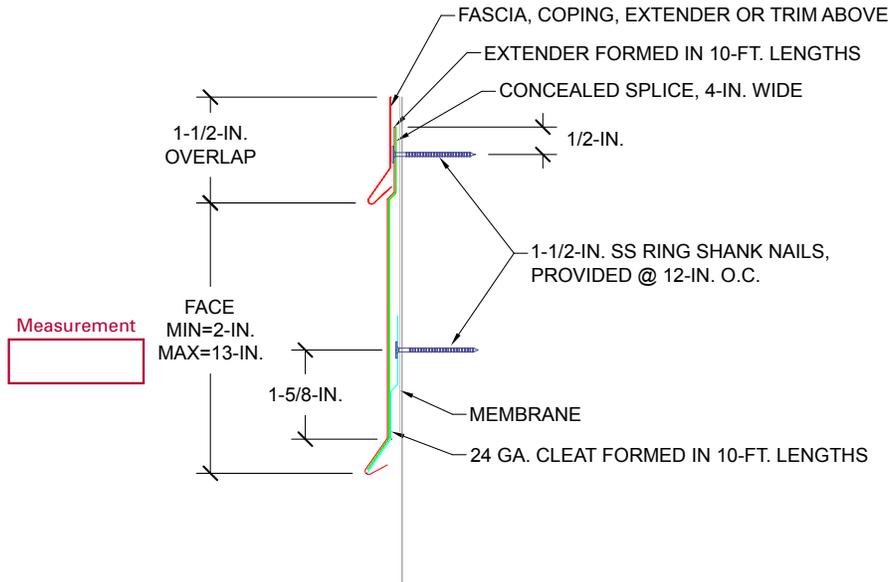


FOR MASONRY APPLICATIONS, PLEASE CONTACT US.


CONTACT US FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED  
ANSI/SPRI/FM4435/ES-1 DESIGN CRITERIA

APPROVALS		COVER MATERIAL	THICKNESS	COVER FINISH
  Florida Product Approval  		Aluminum Galvanized Steel Stainless Steel	24Ga. 22Ga. .040 in. .050 in. .063 in.	Mill Prefinished Kynar Premium Prefinished Kynar Post Finished Kynar Prefinished Anodized Post Finished Anodized
QUANTITY		ACCESSORY TYPE		
_____	Straight Length	Welded		
_____	Total Miters (Inside: _____ / Outside: _____)	Folded		
_____	Total End Caps (Left: _____ / Right: _____)			
_____	Total End Terms (Left: _____ / Right: _____)			
_____	Radius Notched			
_____	Radius to Straight Miter Notched			
_____	Radius End Cap			
_____	Vault Welded			
_____	Vault to Straight Miter Welded			
_____	Vault End Cap			
_____	Z-Miter			
_____	Ridge Miter			
_____	Valley Miter			
_____	Sumps			
_____	Spillouts			
FACE HEIGHT		CUSTOMER APPROVAL		
_____		<input type="checkbox"/> Approved for Fabrication <input type="checkbox"/> Approved with Changes <input type="checkbox"/> Not Approved		
		_____ Authorized Customer Signature		
		_____ Title <span style="float: right;">Date</span>		
		Job Name:		
		Project Location:		
		Customer:		
		Representative:		


# SecurEdge Extender-B

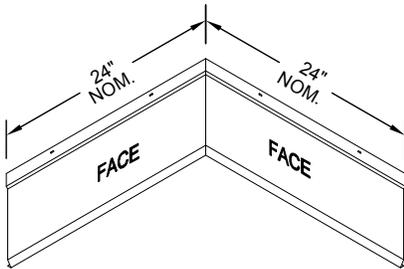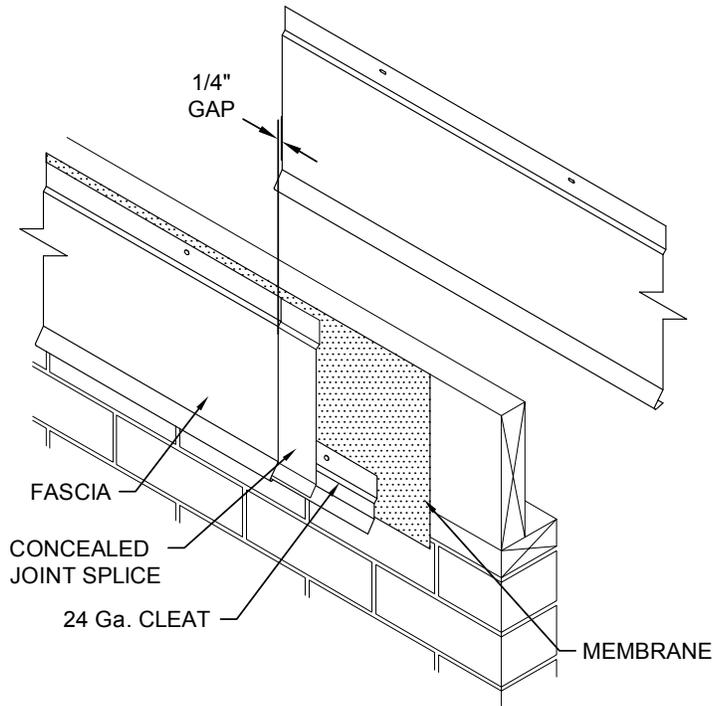


INSIDE MITER

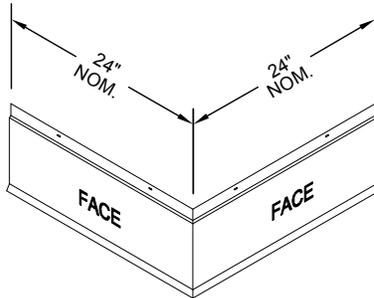

OUTSIDE MITER



END CAP  
LEFT HAND SHOWN



END TERM  
RIGHT HAND SHOWN

Standard fascia miter leg lengths are 24" nominal  
 Standard fascia miter angle is 90°  
 For special miter requirements, attach sketches or consult manufacturer for assistance.