


VersiTrim Extender-B



ANSI/SPRI/FM4435/ES-1 TEST PRESSURES UP TO 107 PSF (HORIZONTAL)


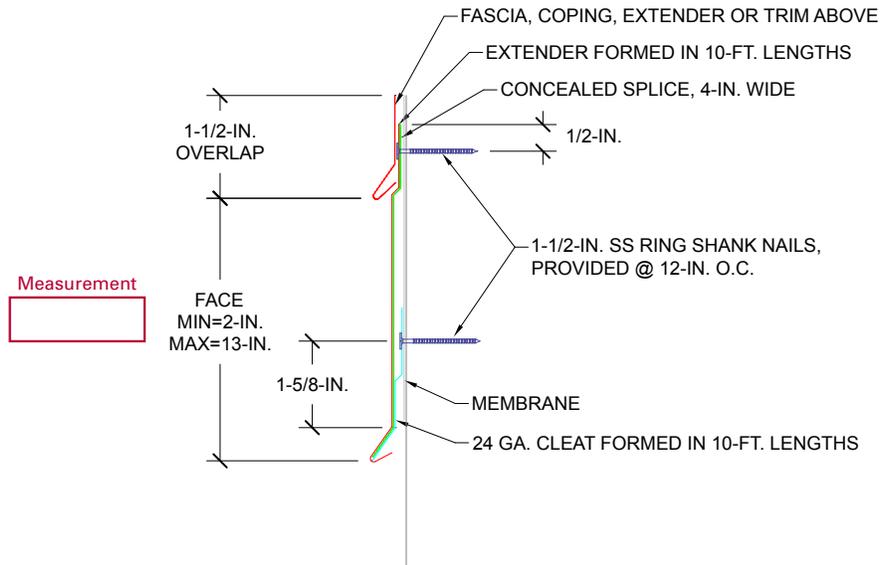


FOR MASONRY APPLICATIONS, PLEASE CONTACT US.


CONTACT US FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED ANSI/SPRI/FM4435/ES-1 DESIGN CRITERIA

APPROVALS		COVER MATERIAL	THICKNESS	COVER FINISH
Florida Product Approval		Aluminum Galvanized Steel Stainless Steel	24Ga. 22Ga. .040 in. .050 in. .063 in.	Mill Prefinished Kynar Premium Prefinished Kynar Post Finished Kynar Prefinished Anodized Post Finished Anodized
QUANTITY		ACCESSORY TYPE	CUSTOMER APPROVAL	
_____ Straight Length _____ Total Miters (Inside: _____ / Outside: _____) _____ Total End Caps (Left: _____ / Right: _____) _____ Total End Terms (Left: _____ / Right: _____) _____ Radius Notched _____ Radius to Straight Miter Notched _____ Radius End Cap _____ Vault Welded _____ Vault to Straight Miter Welded _____ Vault End Cap _____ Z-Miter _____ Ridge Miter _____ Valley Miter _____ Sumps _____ Spillouts		Welded Folded	Approved for Fabrication Approved with Changes Not Approved _____ Authorized Customer Signature	
FACE HEIGHT _____		Title _____ Date _____		
COLOR _____		Job Name: _____ Project Location: _____ Customer: _____ Representative: _____		

VersiTrim Extender-B

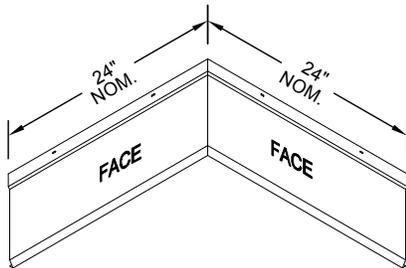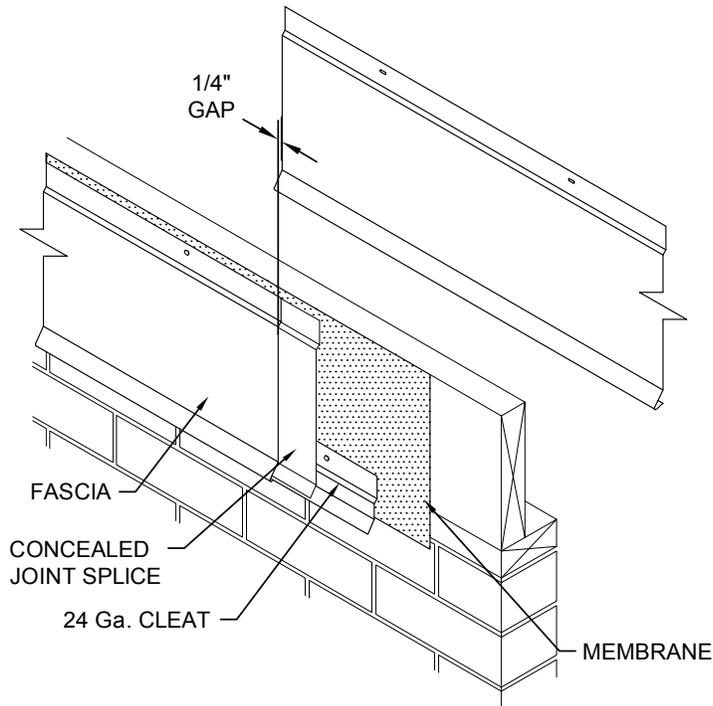


INSIDE MITER

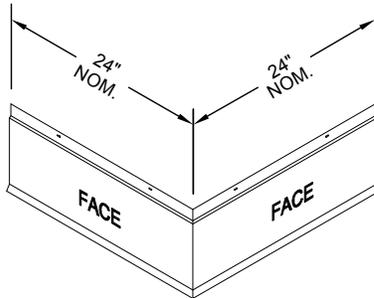


OUTSIDE MITER

Standard fascia miter leg lengths are 24" nominal
 Standard fascia miter angle is 90°
 For special miter requirements, attach sketches or consult manufacturer for assistance.



END CAP
LEFT HAND SHOWN



END TERM
RIGHT HAND SHOWN