


# SecurEdge 300 EdgeBox RI

## Order Specification Form

ANSI/SPRI/FM4435/ES-1 TEST PRESSURES UP TO 911 PSF (VERTICAL) AND 526 PSF (HORIZONTAL)

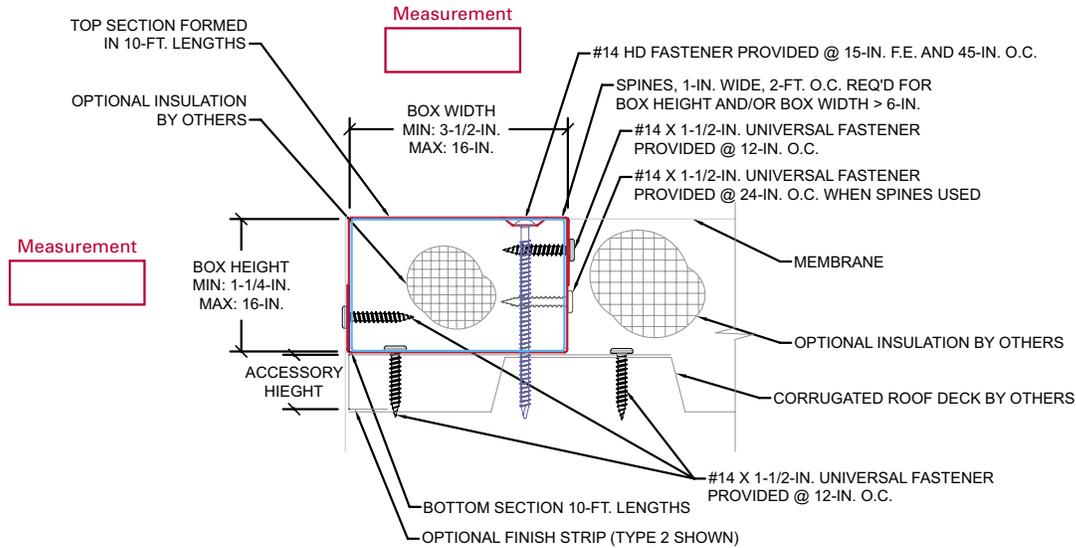

PRE-DRILL WITH 3/16-IN. DRILL BIT FOR MASONRY CONDITIONS.

CONTACT US FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED ANSI/SPRI/FM4435/ES-1 DESIGN CRITERIA

QUANTITY		MATERIAL	ADDITIONAL ACCESSORIES	MATERIAL	
___	Total LF	Mill Galvanized	___	Total LF - Finish strip, Type 1	Mill Galvanized
___	End Caps ( ___ Left, ___ Right)	_____	___	Total LF - Finish strip, Type 2	_____
___	Box Width	20 Ga	___	Total LF - Closure strip	_____
___	Box Height	_____	___	Height	_____
DIMENSIONS		THICKNESS	THICKNESS		
			20 GA		
			_____		

<b>APPROVALS:</b> Contact manufacturer for verification of test report data on your project.		<b>CUSTOMER APPROVAL</b> Authorized Customer Signature	
 		Approved for Fabrication Approved with Changes Not Approved	
		_____ Title                      Date	
Job Name:	Job #:	By:	
Customer:	Project Location:	Date:	
Representative:	Architect:	Sheet	of

# SecurEdge 300 EdgeBox RI

