


ORDER SPECIFICATION FORM

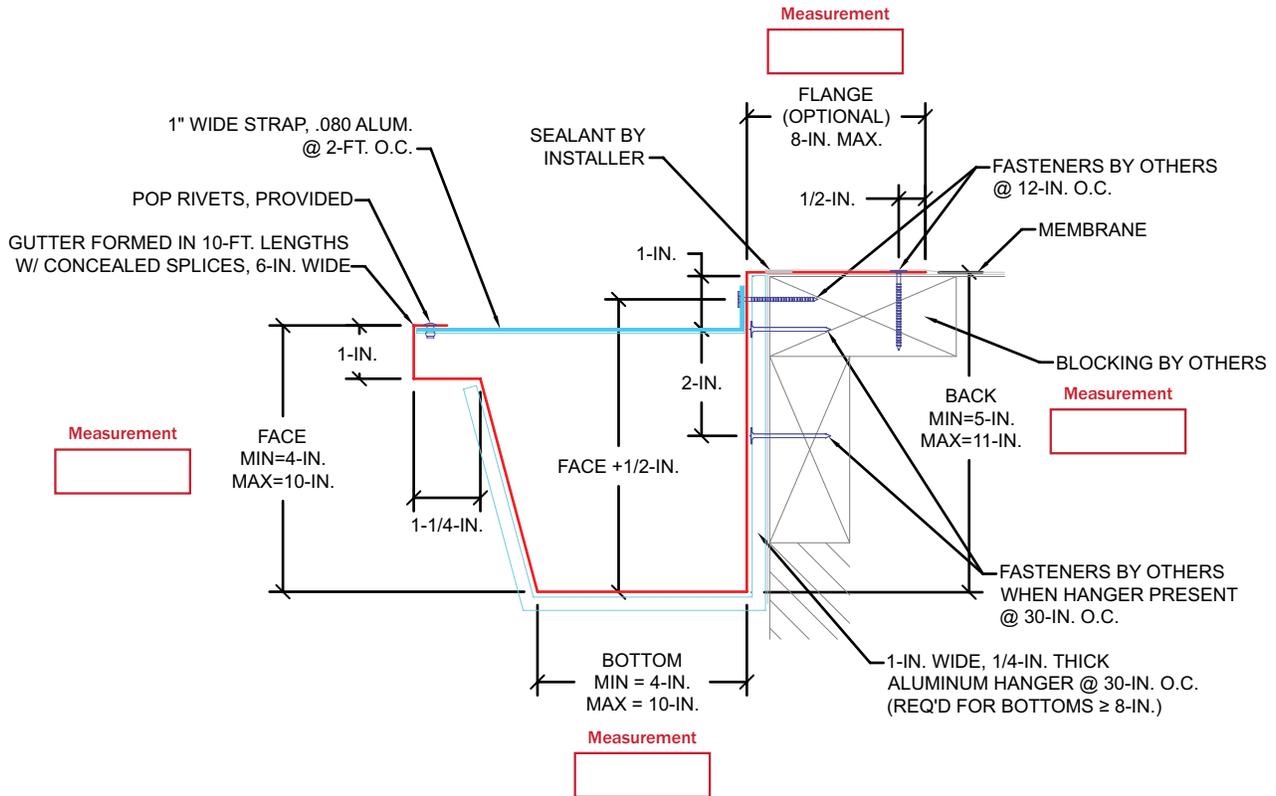

FOR MASONRY APPLICATIONS, PLEASE CONTACT HICKMAN.

CONTACT HICKMAN FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED ANSI/SPRI/GT-1 DESIGN CRITERIA

QUANTITY	CAP MATERIAL	THICKNESS	ACCESSORY TYPE	CAP FINISH
___ Total LF (10' pcs)	Aluminum	0.040	Welded	Mill Finish
___ Miters (___ Outside, ___ Inside)	Galvanized	0.050	Metal-Lok	Prefinished Kynar
___ End Caps (___ Left, ___ Right)	Stainless Steel	0.063		Post Finished Kynar
___ Expansion Joints (If Required)	_____	0.080	HANGERS	Prefinished Anodized
___ Radius LF (5'-0" pcs)		24 Ga.	Painted	Post Finished Anodized
	COLOR	22 Ga.	Mill	_____
	_____	_____	None	


APPROVALS: Contact manufacturer for verification of test report data on your project. <div style="border: 1px solid black; padding: 5px; display: inline-block;">ANSI/SPRI/GT-1/Tested</div>	CUSTOMER APPROVAL Authorized Customer Signature Approved for Fabrication Approved with Changes Not Approved	
	Title _____ Date _____	By: _____ Date: _____
Job Name: _____ Customer: _____ Representative: _____	Job #: _____ Project Location: _____ Architect: _____	Sheet _____ of _____

HICKMAN

EDGE SYSTEMS

Traditional Gutter with Roof Flange.

ORDER SPECIFICATION FORM

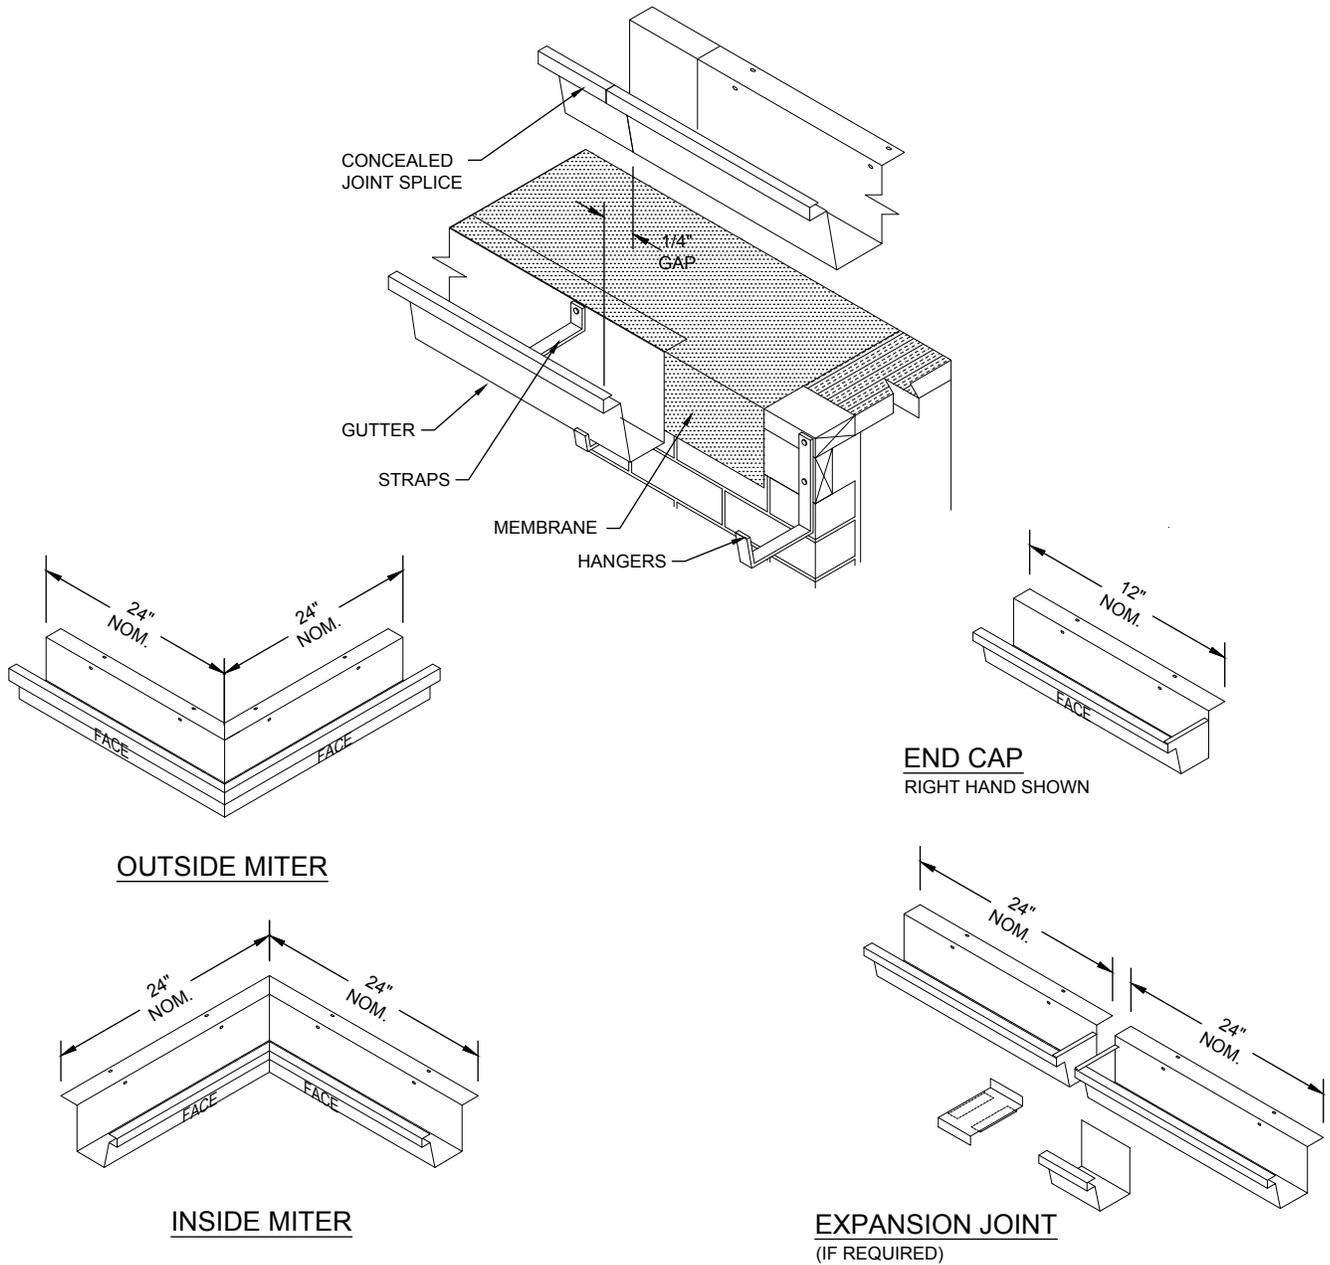

OUTSIDE MITER

INSIDE MITER

Standard gutter miter leg lengths are 24" Nominal
Standard gutter miter angle is 90°
For special miter requirements, attach sketches or consult manufacturer for assistance.

HICKMAN

EDGE SYSTEMS

4 Commerce Way | Arden, NC 28704
(800) 892-9173 | (828) 676-1700 | HickmanEdgeSystems.com
Copyright ©2021. All rights reserved.

Superior productivity.
Superior performance.

