



# TERMINEDGE RADIUS DRIP EDGE EX

ANCHOR BAR @ 6'-0" OR 12'-0" LENGTHS, COVER 6'-0" LENGTHS

**IMPORTANT!!!** MUST INDICATE PROPER RADIUS CONDITION BY CIRCLING APPROPRIATE OUTSIDE FACE

**PROVIDING A RADIUS**  
THE RADIUS MAY BE PROVIDED IN ONE OF TWO METHODS:


1.) THE ACTUAL KNOWN RADIUS IS

\_\_\_\_\_ ' FEET \_\_\_\_\_ " INCHES

OR

2.) FIELD CONDITION MEASUREMENTS

NOTE: REFER TO ATTACHED WORKSHEET FOR FURTHER INFORMATION

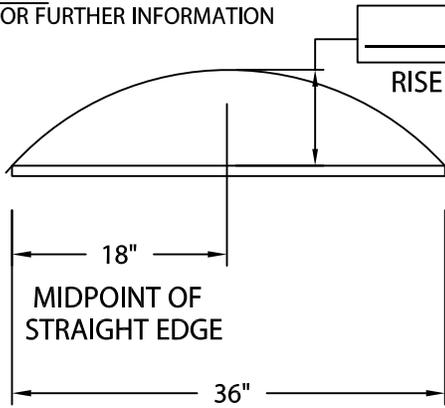


MINIMUM OF 6'-0"  
(CALL IF LESS)  
\* RADIUS PRODUCT NOT REQUIRED IF OVER 100'-0"

MAXIMUM OF 2 9/32"  
(CALL IF MORE)  
\* RADIUS PRODUCT NOT REQUIRED IF UNDER 5 1/32"

LENGTH OF STRAIGHT EDGE

NOTE: CHECK MEASUREMENTS ALONG ENTIRE RADIUS.

DETAIL A

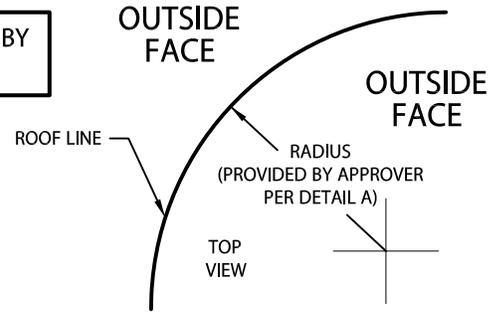


----- INDICATES AREAS THAT WILL BE SLIT AS NEEDED TO ACCOMMODATE RADIUS

COVER 6'-0" LENGTHS



ANCHOR BAR



RADIUS EXTRUDED BAR, PROVIDED ROLLED IN EITHER 6'-0" OR 12'-0" LENGTHS, DEPENDING ON RADIUS CONDITION

NOTE: PROVIDED WITH 1" LAP NOTCH

## TERMINEDGE RADIUS DRIP EDGE DIMENSIONS

PRODUCT ID. NO.	H DIM
<input type="checkbox"/> AFDE-30	3"
<input type="checkbox"/> AFDE-45	4 1/2"
<input type="checkbox"/> AFDE-60	6"
<input type="checkbox"/> AFDE-75	7 1/2"

Fabrication will proceed only after receipt of signed print approval.

## Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with printed instructions.

Approved by: \_\_\_\_\_

Date: \_\_\_\_\_

## MATERIAL:

\_\_\_\_\_ 24 GA. GALVANIZED STEEL  
\_\_\_\_\_ .040" ALUMINUM  
\_\_\_\_\_ OTHER \_\_\_\_\_

COLOR: \_\_\_\_\_

FINISH: \_\_\_\_\_

## QUANTITIES:

\_\_\_\_\_ LINEAL FEET 12'-0" LENGTHS

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

**Hickman Edge Systems**

**4 Commerce Way**

**Arden, NC 28704**

**Phone: 828-676-1700**

**www.hickmanedgesystems.com**



DATE: 11/11/22

DRN BY: MLM

CKD BY: MM

SHT.# \_\_\_\_ OF \_\_\_\_

DWG# 64010-39856

A