


VersiTrim 3000 Fascia



Order Specification Form

ANSI/SPRI/FM4435/ES-1 TEST PRESSURES UP TO 381 PSF (HORIZONTAL)

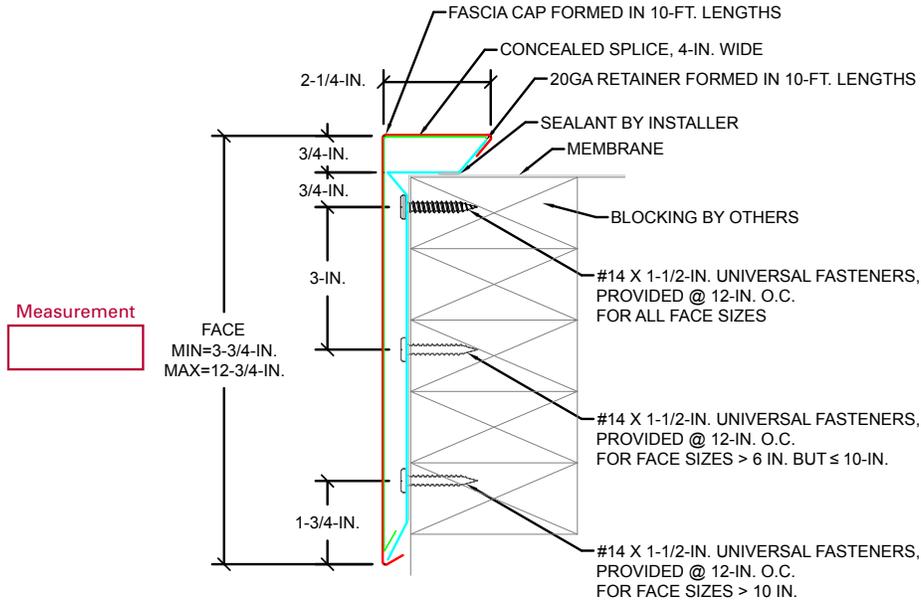

PRE-DRILL WITH 3/16-IN. DRILL BIT FOR MASONRY CONDITIONS.
CONTACT US FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED
ANSI/SPRI/FM4435/ES-1 DESIGN CRITERIA

APPROVALS		COVER MATERIAL	THICKNESS	COVER FINISH
Florida Product Approval		Aluminum Galvanized Steel Stainless Steel	24Ga. 22Ga. .040 in. .050 in. .063 in.	Mill Prefinished Kynar Premium Prefinished Kynar Post Finished Kynar Prefinished Anodized Post Finished Anodized
QUANTITY		ACCESSORY TYPE		
_____ Straight Length _____ Total Miters (Inside: _____ / Outside: _____) _____ Total End Caps (Left: _____ / Right: _____) _____ Total End Terms (Left: _____ / Right: _____) _____ Radius Notched _____ Radius to Straight Miter Notched _____ Radius End Cap _____ Vault Welded _____ Vault to Straight Miter Welded _____ Vault End Cap _____ Z-Miter _____ Ridge Miter _____ Valley Miter _____ Sumps _____ Spillouts		Welded Folded		
FACE HEIGHT		CUSTOMER APPROVAL		
_____		Approved for Fabrication Approved with Changes Not Approved		
_____		_____ Authorized Customer Signature		
_____		_____ Title _____ Date _____		
_____		Job Name: _____		
_____		Project Location: _____		
_____		Customer: _____		
_____		Representative: _____		
COLOR				

VersiTrim 3000 Fascia

