


SecurEdge 3000 Fascia

Formed Galvanized Steel Retainer For Single-Ply

Order Specification Form

ANSI/SPRI/FM4435/ES-1 TEST PRESSURES UP TO 381 PSF (HORIZONTAL)




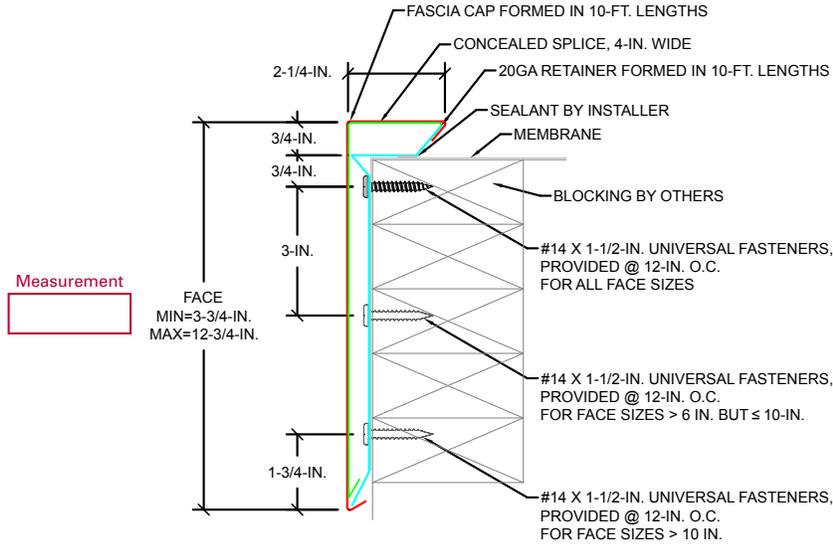


PRE-DRILL WITH 3/16-IN. DRILL BIT FOR MASONRY CONDITIONS.
CONTACT US FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED
ANSI/SPRI/FM4435/ES-1 DESIGN CRITERIA


APPROVALS		COVER MATERIAL	THICKNESS	COVER FINISH
Florida Product Approval		Aluminum Galvanized Steel Stainless Steel	24Ga. 22Ga. .040 in. .050 in. .063 in.	Mill Prefinished Kynar Premium Prefinished Kynar Post Finished Kynar Prefinished Anodized Post Finished Anodized
QUANTITY		ACCESSORY TYPE		
_____	Straight Length	Welded		
_____	Total Miters (Inside: _____ / Outside: _____)	Folded		
_____	Total End Caps (Left: _____ / Right: _____)			
_____	Total End Terms (Left: _____ / Right: _____)			
_____	Radius Notched			
_____	Radius to Straight Miter Notched			
_____	Radius End Cap			
_____	Vault Welded			
_____	Vault to Straight Miter Welded			
_____	Vault End Cap			
_____	Z-Miter			
_____	Ridge Miter			
_____	Valley Miter			
_____	Sumps			
_____	Spillouts			
FACE HEIGHT		CUSTOMER APPROVAL		
_____	COLOR	Approved for Fabrication Approved with Changes Not Approved		
_____	_____	_____ Authorized Customer Signature		
		Title _____ Date _____		
		Job Name: _____		
		Project Location: _____		
		Customer: _____		
		Representative: _____		

SecurEdge 3000 Fascia


Formed Galvanized Steel Retainer For Single-Ply

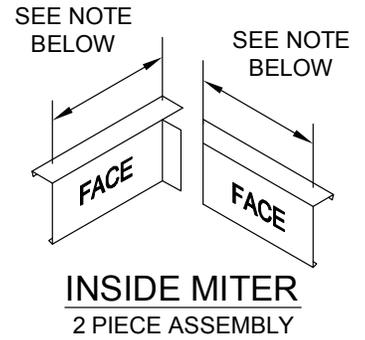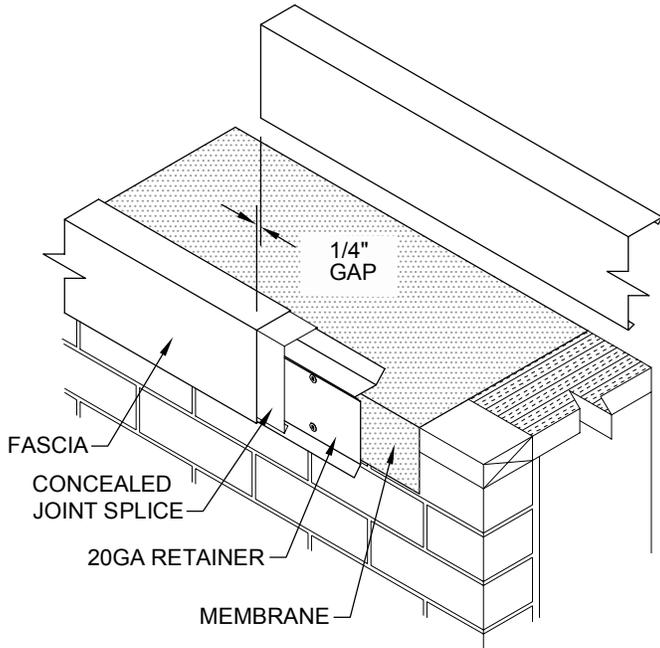


END CAP
LEFT HAND SHOWN



END TERM
RIGHT HAND SHOWN



SUMP
2 PIECE ASSEMBLY



SPILLOUT
3 PIECE ASSEMBLY

Standard fascia miter leg lengths: 12" nominal

Standard fascia miter angle is 90°

For special miter requirements, attach sketches or consult manufacturer for assistance.