




VERSITRIM SYSTEM 200 FASCIA

SNAP-ON, SINGLE-PLY VERSION

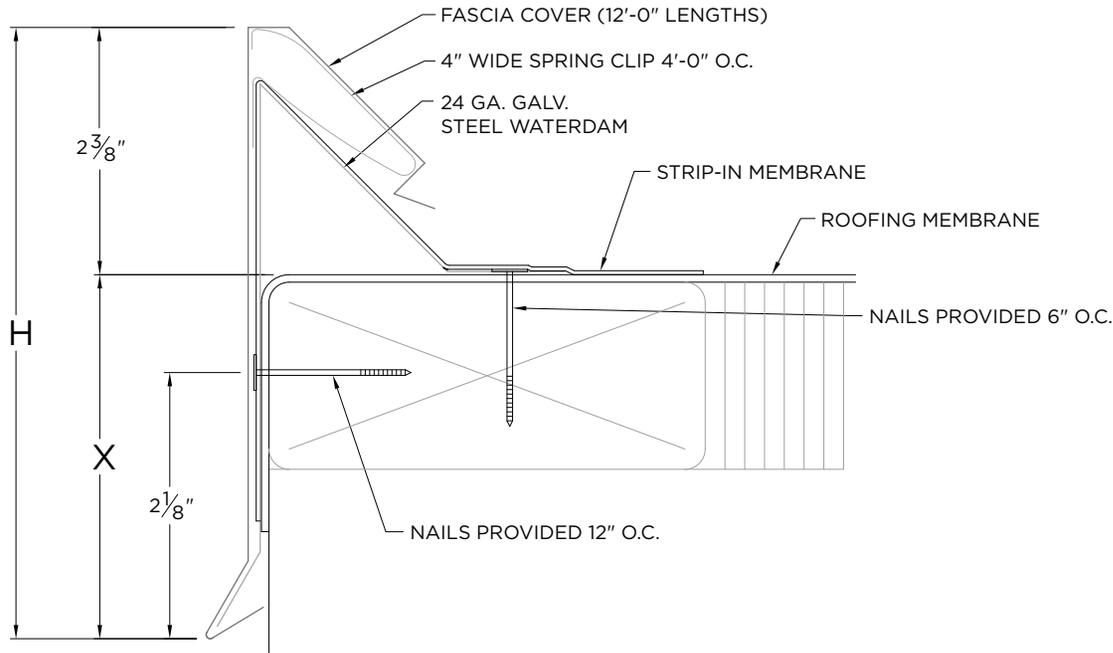

NOTES

- Fascia includes splice plate at joints
- Standard fascia will not function with TPO or PVC strip-in membrane thicker than .060"
- Oil canning can occur on larger face heights; recommend .050" or .063" for face heights above 8.25"
- Welded accessories require minimum material thickness of .050"
- Unless otherwise noted, fabrication of miters and accessories are furnished standard
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 216 psf

APPROVALS



ANSI/SPRI/FM 4435/ES-1
Test Pressures listed in notes

PROJECT INFO

Project Name: _____

Architect: _____

Roofing Contractor: _____

Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: _____

Versico
Customer Service
800-558-2162
(Metal-Era)

SHT# 1 of 1

DATE: 12/21/ 21

DRN BY: JJC

CKD BY: MM

DWG #: 18010-21545

REV: E

DIMENSIONS

| PRODUCT ID. NO. | H DIM | X DIM | NAILER COVERAGE |
|---------------------------------|---------|---------|-----------------|
| <input type="checkbox"/> FA-50 | 5 1/4" | 2 7/8" | 1 NAILER |
| <input type="checkbox"/> FA-65 | 6 3/4" | 4 3/8" | 2 NAILERS |
| <input type="checkbox"/> FA-80 | 8 1/4" | 5 7/8" | 3 NAILERS |
| <input type="checkbox"/> FA-95 | 9 3/4" | 7 3/8" | 4 NAILERS |
| <input type="checkbox"/> FA-110 | 11 1/4" | 8 7/8" | 5 NAILERS |
| <input type="checkbox"/> FA-125 | 12 3/4" | 10 3/8" | 6 NAILERS |

MATERIAL

- 24 Ga. Galv. Steel
- 22 Ga. Galv. Steel
- .040" Aluminum
- .050" Aluminum
- .063" Aluminum
- OTHER: _____

Color: _____

Finish: _____

Substrate: Wood

If substrate is not given, wood fasteners will be provided. Masonry

Metal

QUANTITIES

_____ Lineal Feet (12'-0" Lengths)

_____ Outside Miter (90°)

_____ Inside Miter (90°)

_____ Right Endcaps

_____ Left Endcaps

_____ Right Endwall Flashing

_____ Left Endwall Flashing

Accessory Type:

Quicklock (Default)

Welded (Surcharge)

_____ Overflow Scupper

Style A

Style B

_____ Spillout Scupper

Style A

Style B

_____ Downspout Scupper

Style A Style B

Size _____x_____

Style A=Tapered 1.5" Drop | Style B=Flat