




# VERSITRIM SYSTEM 200 FASCIA

CRIMP-ON, SINGLE-PLY VERSION

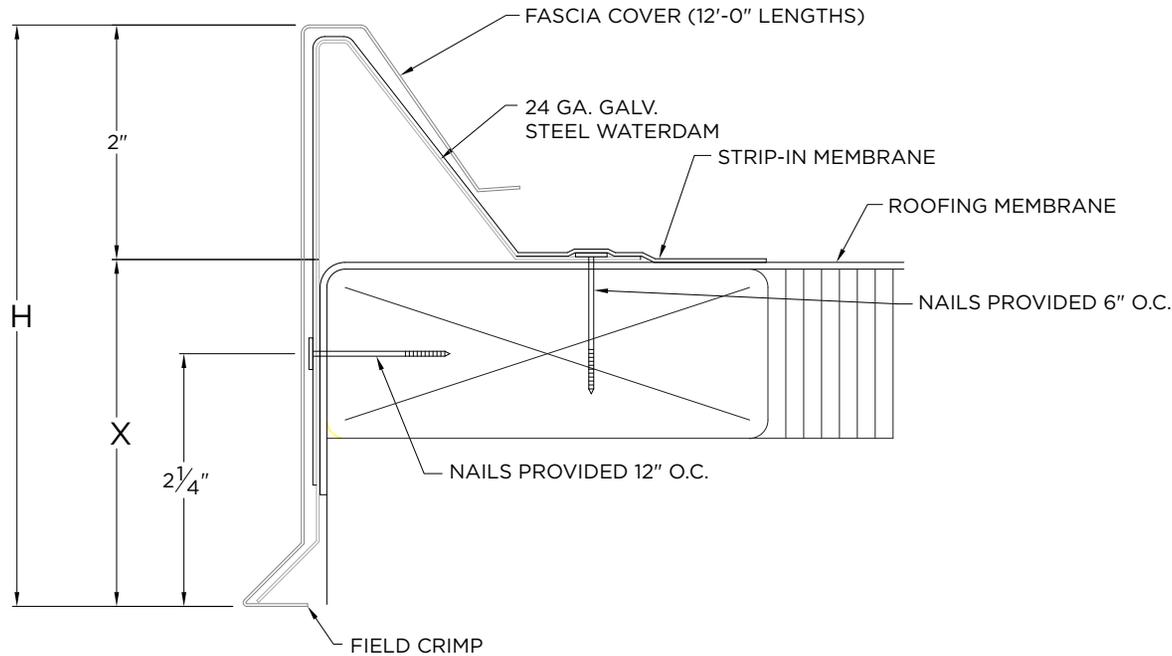

## NOTES

- Fascia includes splice plate at joints
- Standard fascia will not function with TPO or PVC strip-in membrane thicker than .060"
- Oil canning can occur on larger face heights; recommend .050" or .063" for face heights above 8"
- Welded accessories require minimum material thickness of .050"
- Unless otherwise noted, fabrication of miters and accessories are furnished standard
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 196 psf

## APPROVALS



**ANSI/SPRI/FM 4435/ES-1**  
Test Pressures listed in notes

## PROJECT INFO

Project Name: \_\_\_\_\_

Architect: \_\_\_\_\_

Roofing Contractor: \_\_\_\_\_

### Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: \_\_\_\_\_

**Versico**  
Customer Service  
800-558-2162  
(Metal-Era)

SHT# 1 of 1

DATE: 12/21/ 21

DRN BY: JJC

CKD BY: MM

DWG #: 18010-21635

REV: C

## DIMENSIONS

PRODUCT ID. NO.	H DIM	X DIM	NAILER COVERAGE
<input type="checkbox"/> FA-50	5"	3"	1 NAILER
<input type="checkbox"/> FA-65	6 1/2"	4 1/2"	2 NAILERS
<input type="checkbox"/> FA-80	8"	6"	3 NAILERS
<input type="checkbox"/> FA-95	9 1/2"	7 1/2"	4 NAILERS
<input type="checkbox"/> FA-110	11"	9"	5 NAILERS
<input type="checkbox"/> FA-125	12 1/2"	10 1/2"	6 NAILERS

## MATERIAL

- 24 Ga. Galv. Steel
- 22 Ga. Galv. Steel
- .040" Aluminum
- .050" Aluminum
- .063" Aluminum
- OTHER: \_\_\_\_\_

Color: \_\_\_\_\_

Finish: \_\_\_\_\_

**Substrate:**  Wood

Masonry

Metal

If substrate is not given, wood fasteners will be provided.

## QUANTITIES

\_\_\_\_\_ Lineal Feet (12'-0" Lengths)

\_\_\_\_\_ Outside Miter (90°)

\_\_\_\_\_ Inside Miter (90°)

\_\_\_\_\_ Right Endcaps

\_\_\_\_\_ Left Endcaps

\_\_\_\_\_ Right Endwall Flashing

\_\_\_\_\_ Left Endwall Flashing

Accessory Type:

Quicklock (Default)

Welded (Surcharge)

\_\_\_\_\_ Overflow Scupper

Style A

Style B

\_\_\_\_\_ Spillout Scupper

Style A

Style B

\_\_\_\_\_ Downspout Scupper

Style A  Style B

Size \_\_\_\_\_x\_\_\_\_\_

Style A=Tapered 1.5" Drop | Style B=Flat